


LED Troffer 2G Series


Version 3

Product features:

1. Ultra Slim, 10 inch high only , 40'HQ can load 1400 pieces.
2. Smooth and comfortable light, low glare, flicker free, $Ra > 80$, $R9 > 0$.
3. CCT: 3000K, 3500K, 4000K, 4500K, 5000K, 5500K, 6000K.
4. High lighting efficiency 125lm/W, clear Lens 130lm/W.
5. High quality driver, input voltage AC100-277V, High efficiency $> 87\%$, $PF > 0.9$, $THD < 20\%$.
6. 3 to 1 Dimming interface 0-10V / PWM / resistor signal.
7. UL CUL FCC DLC premium certificate.
8. Mainly used in commercial lighting places, such as office, factory and supermarket.
9. Lifespan $> 70,000$ hours & 7 years warranty.

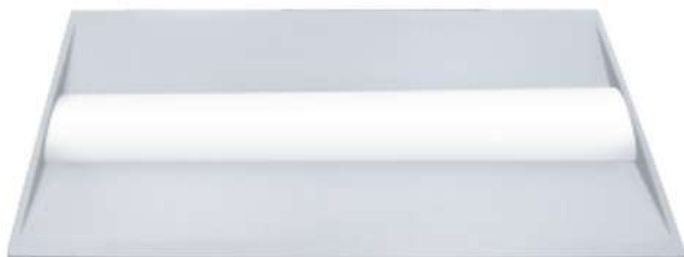

Product Dimensions:

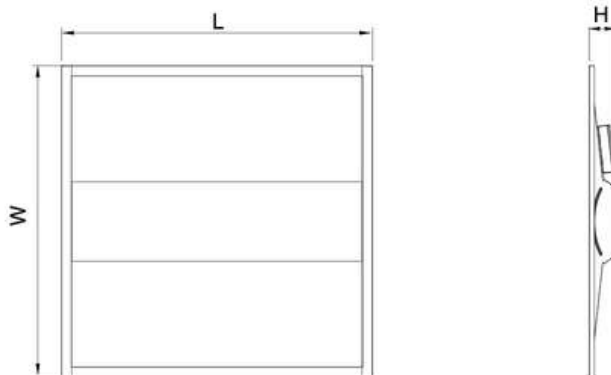

Model	L × W × H (inch)
LLUL-TFA22-XXW-D-P-XXK	23.62" x 25.59" x 1.85"
LLUL-TFA24-XXW-D-P-XXK	23.62" x 47.63" x 1.85"




8ft LED T8 Tube

Specification


Size	Part No.	Power	Input Voltage	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
2×2ft	LLUL-TFA22-20W-D-P-XXK	20W	AC100-277V 347V	2500lm	125lm/w	3000K 4000K 5000K	>140°	>80 R9>0	>0.9	7 Years
	LLUL-TFA22-25W-D-P-XXK	25W		3125lm						
	LLUL-TFA22-30W-D-P-XXK	30W		3750lm						
	LLUL-TFA22-36W-D-P-XXK	36W		5000lm						
	LLUL-TFA22-40W-D-P-XXK	40W		4500lm						
2×4ft	LLUL-TFA24-20W-D-P-XXK	20W	AC100-277V 347V	2500lm						
	LLUL-TFA24-25W-D-P-XXK	25W		3125lm						
	LLUL-TFA24-30W-D-P-XXK	30W		3750lm						
	LLUL-TFA24-36W-D-P-XXK	36W		5000lm						
	LLUL-TFA24-40W-D-P-XXK	40W		4500lm						
	LLUL-TFA24-50W-D-P-XXK	50W		6250lm						

Installation Instruction


1. Unscrew the driver cover.

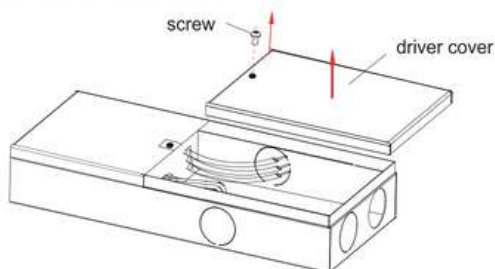


2. Connect the conduit to the driver box.

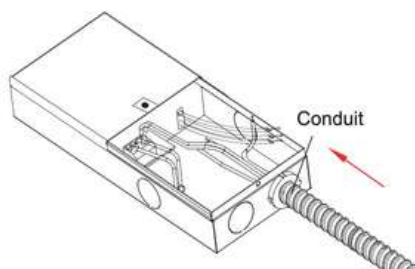

3. Connect other wires separately.

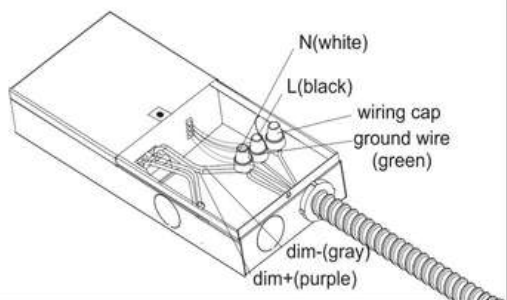


4. Put on the driver cover and fix with screw.

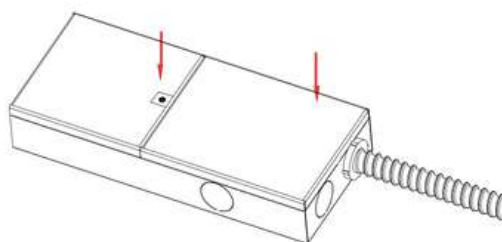


Recessed Installation

1. Replace existing lighting fixture from ceiling with LED Troffer.

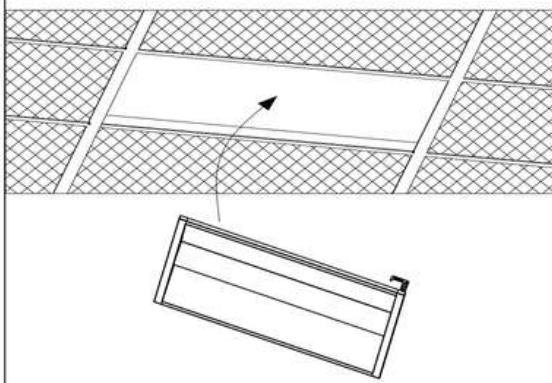

2. Use the protective brackets for the sake of safety.

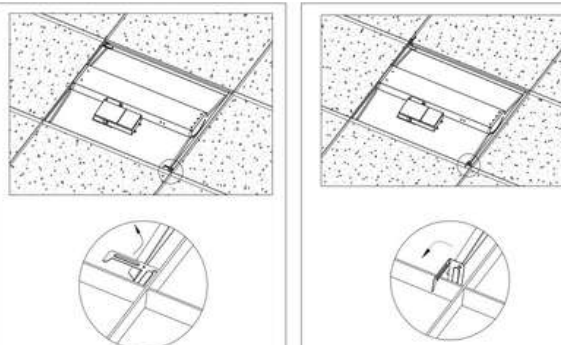

8ft LED T8 Tube

Packing / weight

Part NO.	Outer box (L×W×H)	Qty/Ctn (pcs)	N.W/pcs (lbs)	G.W/Ctn (lbs)
LLUL-TFA22-XXW-D-P-XXK	23.6" × 25.6" × 1.9" 600 × 650 × 47 mm	2	10.36	12.76
LLUL-TFA24-XXW-D-P-XXK	23.6" × 47.6" × 1.9" 600 × 1210 × 47 mm	2	19.80	24.52

Package Diagram



Warning

- Make sure the distances between live part and metal part of LED troffer can satisfy reinforced or double insulation.
- The luminaire should only be installed by a qualified electrician.
- Before installation and maintenance of the LED troffer, please disconnect the power to prevent electric shock.
- Before installation and maintenance, LED troffer must be operated by professional and technical personnel non-professionals do not to remove the light.
- The LED troffer must be installed in an appropriate environment to work. In harsh environments may shorten the life or even damage the light .
- For type Y attachments: If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.