


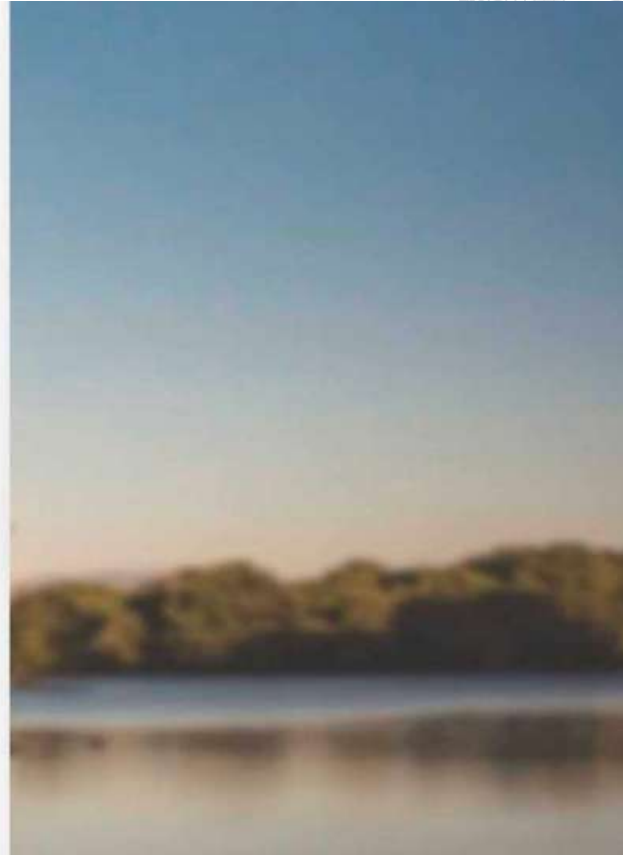

Spec of Business EVSE w/LCD

IP54&IK10

2.5" Digital Screen

Fast to install

Type 2 Plug

RFID(ISO / IEC14443 A/B)

OCPP1.6 J

3-layer housing for easy maintenance

LAN, Wi-Fi and Bluetooth Standard, 3G/4G Optional

Model Name		HP100S	HP100E	HP100T
Power Specification	Input AC Rating	230Vac±10%	400Vac±10%	
	Input Max. AC Current	32A	16A	48A
	Frequency	60Hz/50Hz		
	Max. Output Power	7kW	11kW	22kW
User Interface & Control	Display	2.5" Digital Screen		
	User Authentication	RFID (ISO/IEC14443 A/B), APP		
Communication	Network Interface	LAN, Wi-Fi and Bluetooth Standard, 3G/4G Optional		
	Communication Protocol	OCPP1.6 J		
Environmental	Operation Temperature	-30°C ~ 50°C		
	Humidity	5%~95% RH, Non-condensing		
	Altitude	≤2000m, No Derating		
Mechanical	IP/IK Level	IP54/IK10		
	Cabinet Dimension (W×D×H)	190mm × 87mm × 330mm		
	Weight	5.32kg	5.59kg	5.69kg
	Cable Length	5m(Standard) / 7m(Optional)		
Protection	Multiple Protection	OVP(Over Voltage Protection), OCP(Over Current Protection), OTP(Over Temperature Protection), UVP(Under Voltage Protection), SPD(Surge Protection Detection), Grounding Protection, SCP(Short Circuit Protection), Control Pilot Fault, Relay Welding Detection, RCD(DC 6mA)		
Regulation	Safety	IEC 61851-1, IEC 61851-21-2		
	Certificate	CE, CB, UKCA, TR25 and RCM		
	Charging Interface	IEC 62196-2 Complaint, Type 2 Plug		