

LED Dock Light

Product features:

- **Reliability:** The LED dock light is highly impact-resistant with a durable structure design. Its polyester powder-coated surface ensures long-term use in high-temperature and corrosive environments.
- **Safety:** Dustproof and waterproof, equipped with a secure tightening structure for reliable performance at the loading dock.
- **Energy Saving:** Uses advanced semiconductor LED technology, reducing energy consumption by up to 70% compared to traditional light sources.
- **Economy:** Long-lasting LED SMD with maintenance-free operation.
- **Convenience:** Easy installation with U-tape bracket mounting.
- **Uniqueness:** Superior optical performance with a high-reflecting, high-transmittance focus lens.
- **Durability:** Over 50,000 hours of lifetime use, backed by a 5-year warranty.





Benefits

- Provides optimum brightness across the entire length of the trailer.
- Equipped with an adjustable screw, allowing the lamp's angle to be easily adjusted by hand.
- Compact design with aluminum housing that enhances the cooling system.
- Optional high-visibility beam angles available.
- retail, or warehouse settings.

Applications

- Factory Lighting
- Dock Lighting
- Warehouse Lighting
- Goods Shelf Lighting
- Container Lighting

Dimensional Drawing

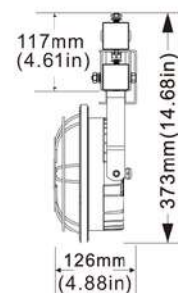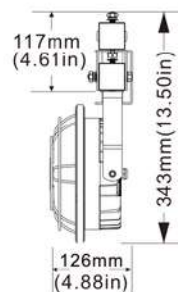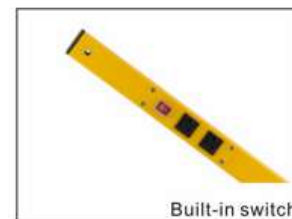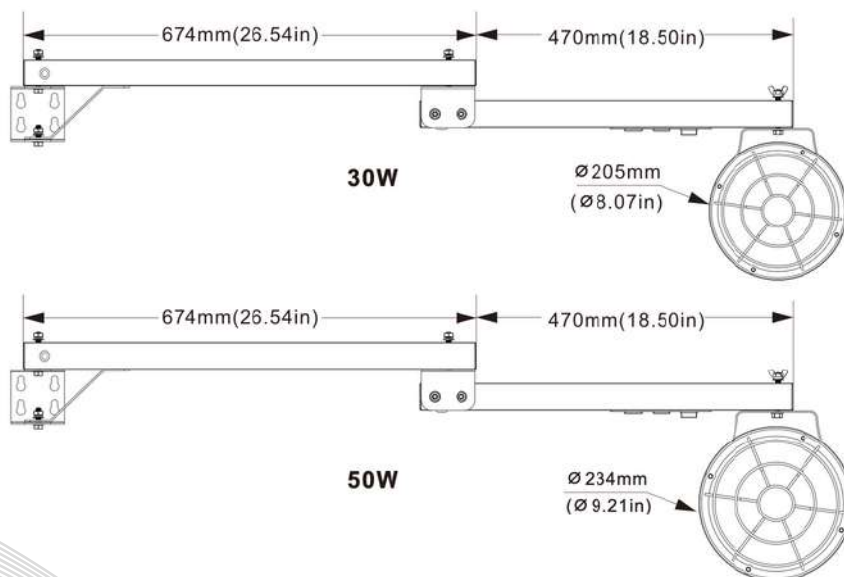


LED Dock Light

Specifications

Power	30W	50W
Model	LLBBI-GKD-30W-H	LLBBI-GKD-50W-H
Luminous Flux	3300lm	5500lm
Replacement	HPS 100W	HPS 150W
Product Size	Lamp size: Ø 205*126mm Bracket size: 1144*56*144mm.	Lamp size: Ø 234*126mm Bracket size: 1144*56*144mm.
Mount Type	Wall mounting	
Accessories	Steel mesh shield	
Light Source	SMD LED	
Luminous Efficacy	110lm/W	
Operation Temp.	-40 to +45℃	
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW	
CRI	70+	
Life Span	50,000 hours at 25℃	
Voltage	100-277VAC/50-60HZ	
Driver	Built-in power supply	
Dimming	No	
Color	Yellow	
Cover	PC lens	
Beam Angle	15°/30°/45°/60°	
IP	65	
PF	>0.95	
Warranty	5Years	

Details

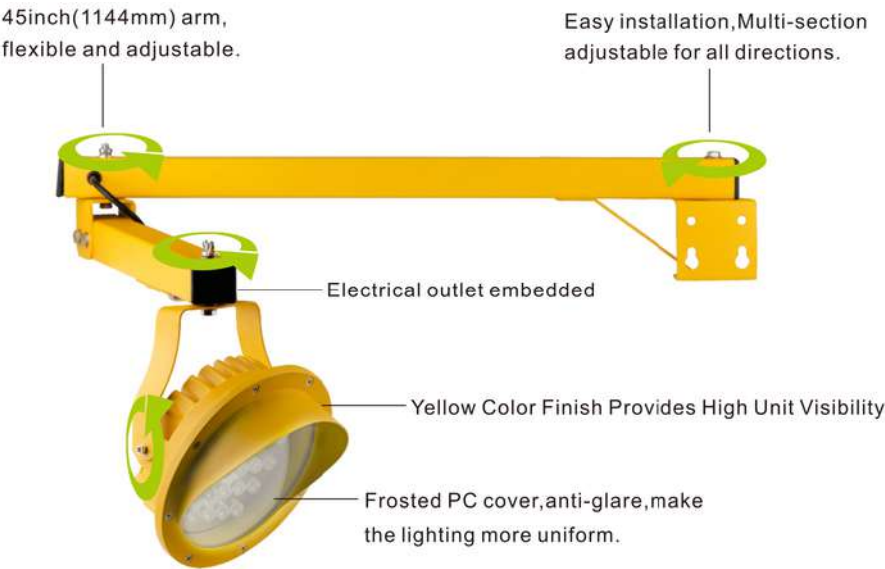

LED Dock Light

Details

Replacing a 300W metal halide bulb with our 30W Dock Light can generate significant monthly savings on electricity costs.



- Note:
- Don't take the LED lamp apart
 - The LED lamp must work under the right voltage according to the specification.

Accessories

Steel mesh available as an optional feature, allowing flexibility to meet specific needs. For more details, please contact the sales team.



steel mesh shield, protect lamps for damage

Packing Info



Items	Packaging	Carton Size(mm) (L*W*H)	N.W	G.W	Volume weight
Lamp	4pcs/CTN	540*320*380mm	5.0kg	6.5kg	15.0kg
Bracket	4pcs/CTN	300*300*800mm	20.0kg	21.5kg	17.0kg