

LED Full Cut-Off Wall Pack

Product Description:

Light up your outdoor area with RZ's LED Full Cut-Off Wall Pack. It is a high efficient lighting solution that provides a long lasting and energy-saving. The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics.

Optional:

- ETL/cETL/DLC premium certificate.
- Easy installation.
- Wet location rated IP65.
- Durable die-cast aluminum housing.
- Photocell and motion sensor options.
- UV-resistant polycarbonate refractor lens.
- Emergency power 4W & operating time 1.5 hours.
- Type III distribution optics standard/Other optics available by request.



Applications:

Outdoor wall mount applications:
 Building facade
 Commercial
 Industrial
 Retail
 Hospitality
 Buildings that demand long service life & low maintenance.

Packing:

Item	QTY	Carton Size	20GP	40GP	40HQ
WP10-30W	1pc/Carton	260*200*265mm 10.24" X 7.87" X 10.24"	2000PCS	3857PCS	4857PCS
WP10-40W					
WP10-50W					
WP10-60W					
WP10-80W					
WP10-100W	1pc/Carton	310*215*275mm 12.20" X 8.46" X 10.83"	1556PCS	3000PCS	3778PCS
WP10-120W					

Features:



Photocell sensor optional.

Good heat dissipation, light weight, cost-effective and low transportation cost.

Plug and play Microwave Motion Sensor

DIP switch, lower inventory risk

Product Dimensions:

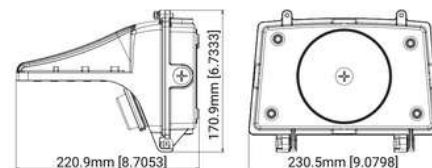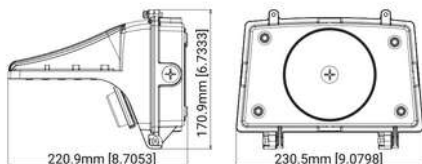

30-80W

100-120W



LED Full Cut-Off Wall Pack

Parameters:

Model No.	WP10-30W	WP10-40W	WP10-50W	WP10-60W	WP10-80W	WP10-100W	WP10-120W
Input Power	30W	40W	50W	60W	80W	100W	120W
Lumen	3900lm	5200lm	6500lm	7800lm	10400lm	13000lm	15600lm
Efficacy	130LM/W (±10%)						
Input voltage	120-277VAC/120-347VAC						
Color Temperature	4000K/5000K/5700K						
THD	<20%						
Dimmable	0-10V						
LED Brand	Lumileds						
LED Type	3030						
LED QTY	48pcs	48pcs	64pcs	72pcs	96pcs	112pcs	140pcs
Viewing Angle	Type III						
Operating Temperature	86°F to 113°F (-30°C to +45°C)						
Operating Humidity	RH<90%						
Storage Temperature	104°F to 158°F (-40°C to +70°C)						
Storage Humidity	RH<95%						
Color Rendering Index	Ra>70						
IP Rating	IP65						
Power Factor	≥0.90						
Frequency	50/60Hz						
Certification	cETL/ETL/DLC Premium						
Housing	Die-cast Aluminum						
Finish	Black/Bronze/Customized (Optional)						
Driver Brand	Weipeng						
Additional function	Photocell/Microwave Motion Sensor						
Life Time	>50,000Hrs						
Warranty	5 Years						