

LED MINI WALLPACK WP20


Product features:

- 20W Rated power
- LED manufactory, could be any alphabet.
- Cover type, could be clear or frosted.
- Version number
- Housing colors, any two letters can of different color
- CCT 27~65, for 2700K~6500K



Advantage:

- UL cUL DLC certificate
- IP65 Internal driver,
- Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury

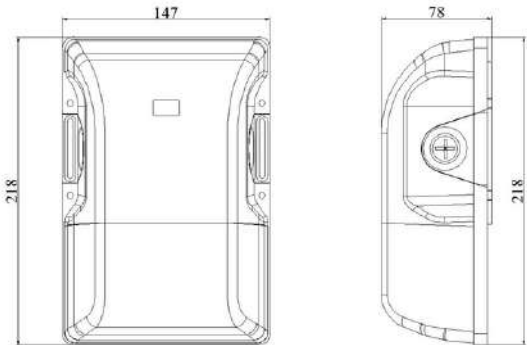

Application:

- entrance lighting
- Courtyard lighting
- Industrial lighting
- Outdoor landscape lighting.
- Building
- Wall lighting area

Product Specifications

Product name	LED Wall Pack Light
Dimension	218*147*78 mm

Technical Characteristic

Color temperature	2700-6500K
CRI	>80
Lumen	2400-2700 LM
Lumen Efficacy	120-135 LM/W
Input Power	20W
Viewing Angle	110°
Input Voltage	100-277VAC 50/60Hz
Driver model	China Brand Driver
PF	>0.9
Waterproof Rating	IP65



LED MINI WALLPACK WP20

Materials



LED Type	2835 (0.5W)
LED QTY	60PCS
Housing	Aluminum
Optional Accessory	Photocell (Option)
Housing color	Any color

Others

Operating Temperature	-20℃ TO 45℃
Operating Humidity	20%-90% RH
Storage Temperature	-30℃ TO 80℃
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL cUL
Warranty Time	5 Years

Light distribution testing parameters

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 137.43 lm/W
MODEL			I _{max} (cd)	985.6	S/MH (C0/180)	1.15
NOMINAL POWER (W)	20		LOR (%)	100.0	S/MH (C90/270)	0.70
RATED VOLTAGE (V)	120		TOTAL FLUX (lm)	2671.6	η UP, DN (C0-180)	9.8, 63.0
NOMINAL FLUX (lm)	2671.64		CIE CLASS	SEMI-D.	η UP, DN (C180-360)	2.0, 25.3
LAMPS INSIDE	1		η up (%)	11.7	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120.0		η down (%)	88.3	CIBSE SHR MAX	1.15

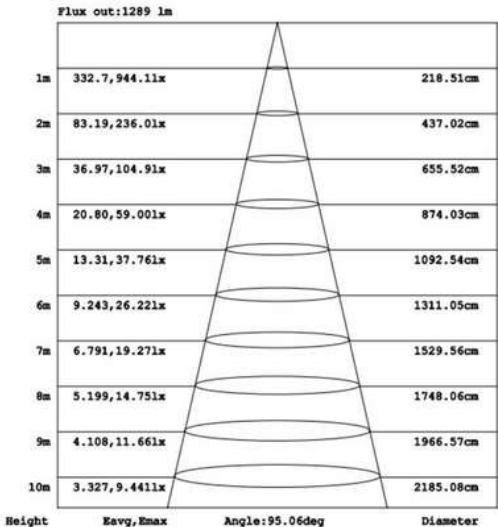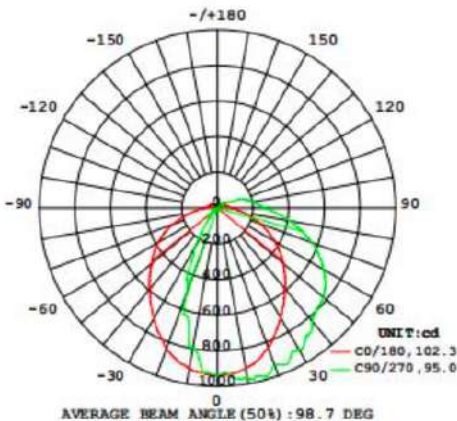


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LED MINI WALLPACK WP20

Package : Lamps net weight: 0.9kg / pcs

	Size	Qty/Carton	Weight/Carton
Outer box	460 X 325 X 245 mm	10	10 kg
Inner box	154 X 88 X 225 mm	1	0.92 Kg

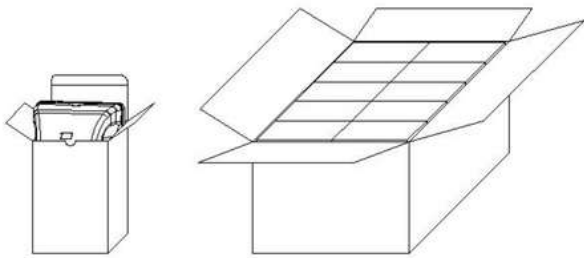

Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line,
- Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

Trouble Shooting

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection