

Oval LED Emergency Wall Pack Light

Features

- Die-cast aluminum housing
- Polycarbonate lens and mirror reflector
- UL-94V-0 flame rating, fire-resistant
- IP65 protection
- Power consumption: 4.8W max
- Output: Super bright COB LED 12W
- 1000lm for general mode
- 433lm for emergency mode
- 4.8V 1800mAh Nickel Cadmium Battery
- Backup time: ≥90minutes
- Charging time: 24 hours
- Overcharge & Over-discharge protection
- Conversion time: <0.2second
- Operating temperature: -10°C~40°C
- Dimension: 10.4"x6.3"

Two Function Indiction

Test Button



Performance

Model NO	Emergency Duration	Wattage	Voltage/Current Input		Lumen Efficiency	Kelvin Options
			120V	277V		
LLEW12W	90 minutes	12W	0.14A	0.05A	100LM/W	5000K

Special functions



1. When the power supply system is out of power, the lamps start the emergency system to turn on the lights, and the duration can be up to 90 minutes.
2. The lamp has a light-sensing function, when the light < 3FC lamps are automatically turned on and the light > 3FC lamps are automatically turned off


Electric Characteristic

Model NO	Input voltage	Color Temperature	Efficiency	Power		CRI	Light Efficiency	Working temperature	Certificate
				Input power	EBU power				
LLEW12W	120-277V/AC	5000K	100LM/W	12W	4W	>72	87D	-10°C+40°C	UL



Oval LED Emergency Wall Pack Light


Dimensions

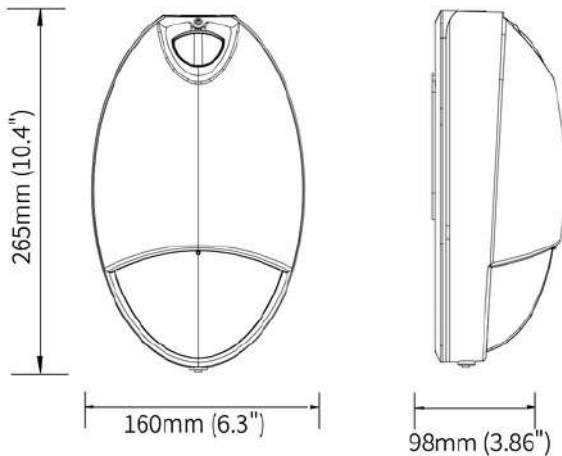

PRODUCT ORDERING GUIDE


LL	EW	12W
1	2	3
LL	-	EW
		12W
☒ LL	LEVIOR	
☒ EW	Emergency Wall Pack	
☒ 12W	Power 12W	

Dimensions

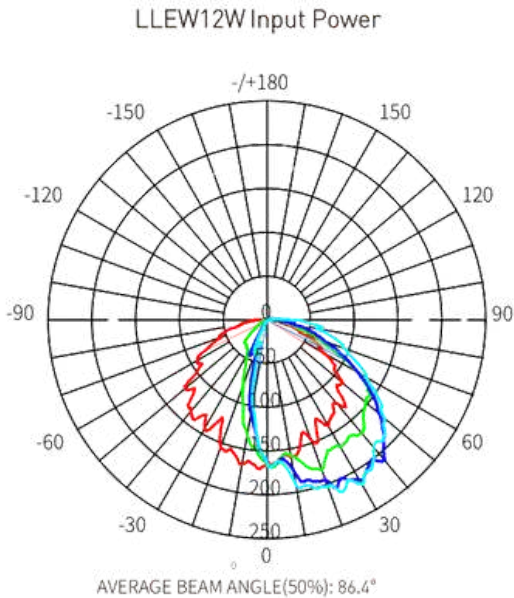

UNIT:CD
 Test Number:LSEW12W
 Lumens:1200LM
 Test Number:12W
 Test Number:5000K

— C0/180,120.1
 — C30/210,120.9
 — C60/240,111.3
 — C90/270,131.4

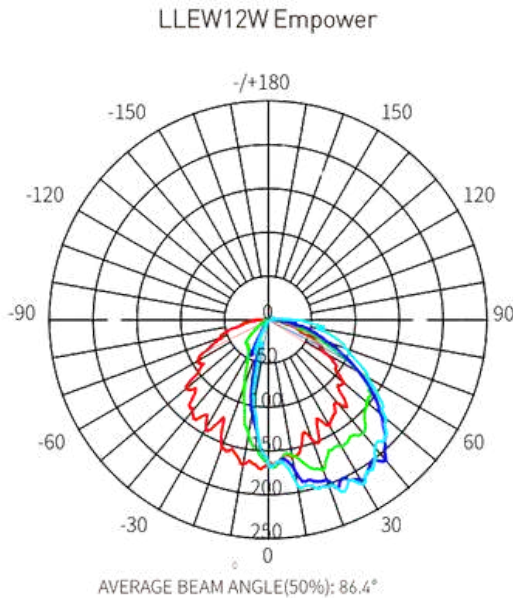

UNIT:CD
 Test Number:LSEW12W
 Lumens:400LM
 Test Number:4W
 Test Number:5000K

— C0/180,120.1
 — C30/210,120.9
 — C60/240,111.3
 — C90/270,131.4