

Wallpack LED Light

Product features:

- Die-casting aluminum with advanced glass lense.
- Three quick mount clips allow quick install and maintenance.
- IP 65 waterproof
- 50,000hours life time.

Suitable Applications

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

Construction:

Heavy die-cast aluminum alloy housing, with bronze powder-coated finish.

Optical System:

High brightness lumileds LED chips.
high transmittance rate, glass optics.120° beam angle.

Warranty:

5-year limited warranty.
Actual performance may differ as a result of end-user environment and application.

Performance



Electrical:

Available as 120-277V or 480V input. -20°C to 45°C.

Installation & Mounting

Wall mounting with backside plate for easy install.

Controls & Dimming


Built-in CCT & power tunable switch

Model NO	PFC	Wattage Tunable	Voltage/Current Input			Light Efficiency	Kelvin Tunable
			120V	277V	480V		
LL-WP60W-50K	>0.9	60W	0.50A	0.21A	0.50A	130LM/W	3500K/4000K/5000K
LL-WP80W-50K	>0.9	80W	0.66A	0.28A	0.66A	130LM/W	3500K/4000K/5000K
LL-WP100W-50K	>0.9	100W	0.83A	0.36A	0.83A	130LM/W	3500K/4000K/5000K



Wallpack LED Light

Special Function

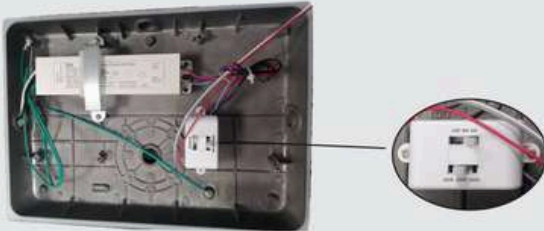

The lamps have the function of adjusting power and color temperature.

PRODUCT ORDERING GUIDE

LL-WP60/80/100W-50K

1 2 3 4
LL - WP 60/80/100W - 50K

☒ LL LEVIOR

☒ WP WALLPACK

☒ 60W Power 60W ☐ 80W Power 80W

☐ 100W Power 100W

☐ 35K CCT:3500K


☐ 40K CCT:4000K

☒ 50K CCT:5000K

Electric Characteristic

Specification/Model	LL-WP60/80/100W-XXK		
LED Driver	UL Listed KHM Brand driver		
Input power	60W	80W	100W
Lumens output	7800LM	10400LM	13000W
Efficiency	130LM/W	130LM/W	130LM/W
CRI	>72	>72	>72
Color Temperature	5000K	5000K	5000K
Input voltage	120-277V/AC	120-277V/AC	120-277V/AC
Light distribution type	120D	120D	120D
Working temperature	-20+45℃	-20+45℃	-20+45℃
Junction temperature	<75℃	<75℃	<75℃
lamps efficiency	≥90%	≥90%	≥90%
Certificate	UL CUL DLC	UL CUL DLC	UL CUL DLC
Equivalent	120-200W MH/HPS	200-250W MH/HPS	250-300W MH/HPS

DIMENSION

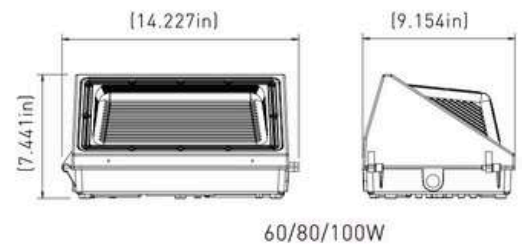

Note

- 1.The installation and maintenance mustbe completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture
- 4.Please keep away from the corrosive substance.

Wallpack LED Light

DISTRIBUTION DIAGRAM

